



Zecks Power Co., Ltd.

2F, NO.111-33, Sec. 4, San Ho Rd., San Chung City, Taipei, Taiwan, R.O.C.
Tel: 886-2-22870818 Fax: 886-2-22801351 E-Mail: zecks@tpts4.seed.net.tw

Specification of Redundant ATX Switching Power Supply

⊗ ATX 12V For Pentium 4 ⊗

Model No. ZKS-350WX-2X

∫ ∫ Total Wattage 350W + 350W ∫ ∫

Prepared By	Designed By	Approved By	Issued By

1. INPUT

- 1.1 AC Input; 15V (90V ~ 135V) ; F230V (180V ~ 265V)
Voltage selector by slide switches
- 1.2 AC Input Current; 15Vrms / 9A ; F230Vrms / 5A
(@ without AC Outlet)
- 1.3 Brown Out Voltage; 95VAC max. @ 60Hz.
- 1.4 Inrush Current; 45A max. / 115V , 90A max. / 230V
(at 25°C Jambient cold start)

2. DC OUTPUT; G

i p p p p p »	V1	V2	V3	V4	V5	V6
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
Max. Current	28A (I1)	30A (I2)	15A	0.5A	1A	2A
Min. Current	2.8A	3A	1.5A	0A	0A	0.2A
Load Regulation	5%	5%	5%	10%	10%	5%
Line Regulation	1%	1%	1%	2%	2%	1%
Ripple & Noise	50mv	50mv	50mv	150mv	150mv	50mv
i i i i i i -	Total 190W Max.		i i i -	i i i -	i i i -	i i i -

$$(V1 \cdot I1) + (V2 \cdot I2) < 190W$$

Note; A low pass filter shall be added to outputs during measurement. (EXP. i 47uF Tan-cap. & 0.1uF Ceramic-cap.)

3. OVERALL PERFORMANCE

- 3.1 Total Output Power; 350W @ 45°C J
- 3.2 Efficiency; 70% min. at full load (AC input 230V)
- 3.3 Power Up Time; 20ms for +5V output voltage.
- 3.4 Hold Up Time; 6 ms min.
- 3.5 Power Good Time; The PWR-GOOD signal will not be higher than 100 - 500 ms after the +5V output stabilizes at its operating value when the unit is turn on.
- 3.6 Power Fail Signal; The TTL compatible signal will go down at least 1 ms before +5V below 4.75V
- 3.7 Switching Frequency; 30KHz Typical.
- 3.8 Temperature coefficient; 0.05% per°C J
- 3.9 PS on Signal; TTL compatible signal (active low)

4. PROTECTION FEATURES

4.1 Over Voltage Protection; G

DC +3.3V output from 3.8V ~ 4.3V

DC +5V output from 5.7V ~ 7.0V

DC +12V output from 13.4V ~ 15.6V

4.2 Over Load Protection : Total output 120% Min. ~ 160% Max.

4.3 Short Circuit; Catch off

5. ENVIRONMENTAL

5.1 Operation Temperature; 0°C J~ 45°C J(at 75% load 115V \ 230V)

5.2 Cooling; Forced air ventilation by DC fan.

5.3 Fan type; Ball Bearing Fan

5.4 Fan status monitoring; Optional.

5.5 Humidity; 10% ~ 90% RH

5.6 Storage Temperature; -20°C J~ 80°C J

5.7 Storage Humidity; 5% ~ 90% RH

5.8 Altitude; 10,000 ft max.

6. SAFETY APPROVAL

a. UL 1950 / cUL 1950 D3

b. TUV EN60950

c. Nordic

d. CB IEC 60950

e. CE Test Report

7. ELECTROMAGNETIC COMPATIBILITY; G

7.1 Electromagnetic Interference (EMS); G

a. FCC Part 15, subjecting, class B

b. CISPR-22, class B

7.2 Electrostatic Discharge (ESD); Comply with IEC801-2.

7.3 Radiated Susceptibility (RS); Comply with IEC801-2.

7.4 Harmonics; Meet EN61000-3-2 class A (@ PC system)

8. DIELECTRIC WITHSTAND (HI-POT) TEST

8.1 Primary to Secondary; 1800VAC -- 3 Sec. (5mA cut - off)

8.2 Primary to Ground; 1800VAC -- 3 Sec. (5mA cut - Off)

8.3 Leakage Current < 3.5mA at input 230V~ 60Hz

8.4 Ground Continuity; $\leq 100\text{m}\Omega$ (max. when the test current is at 25A)

9. INSULATION RESISTANCE

9.1 Input to Output; $\geq 20\text{M}\Omega$ (min.)

9.2 Input to Ground; $\geq 20\text{M}\Omega$ (min.)

10. RELIABILITY; \geq MTBF 100,000 hours @ 25°C Ambient.

11. SHOCK AND VIBRATION


The power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Storage -40G , 11mSec. half-sine wave pulse in both directions on three mutually perpendicular axes.





Operating -10G , 11mSec. half-sine wave pulse in both directions on three mutually perpendicular axes.

Vibration Operation-Sine wave excited, 0.25G maximum acceleration, 10 - 250Hz swept at one octave/minute. Fifteen-minute dwell at all frequencies at which the device under test experience excursions two times large than non-resonant excursions.

12. MECHANICAL; $\approx 2.5 \times 185 \times 153.5\text{mm}$ (See drawing)

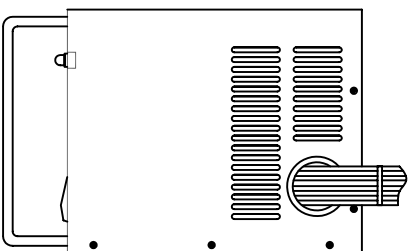

Dimension

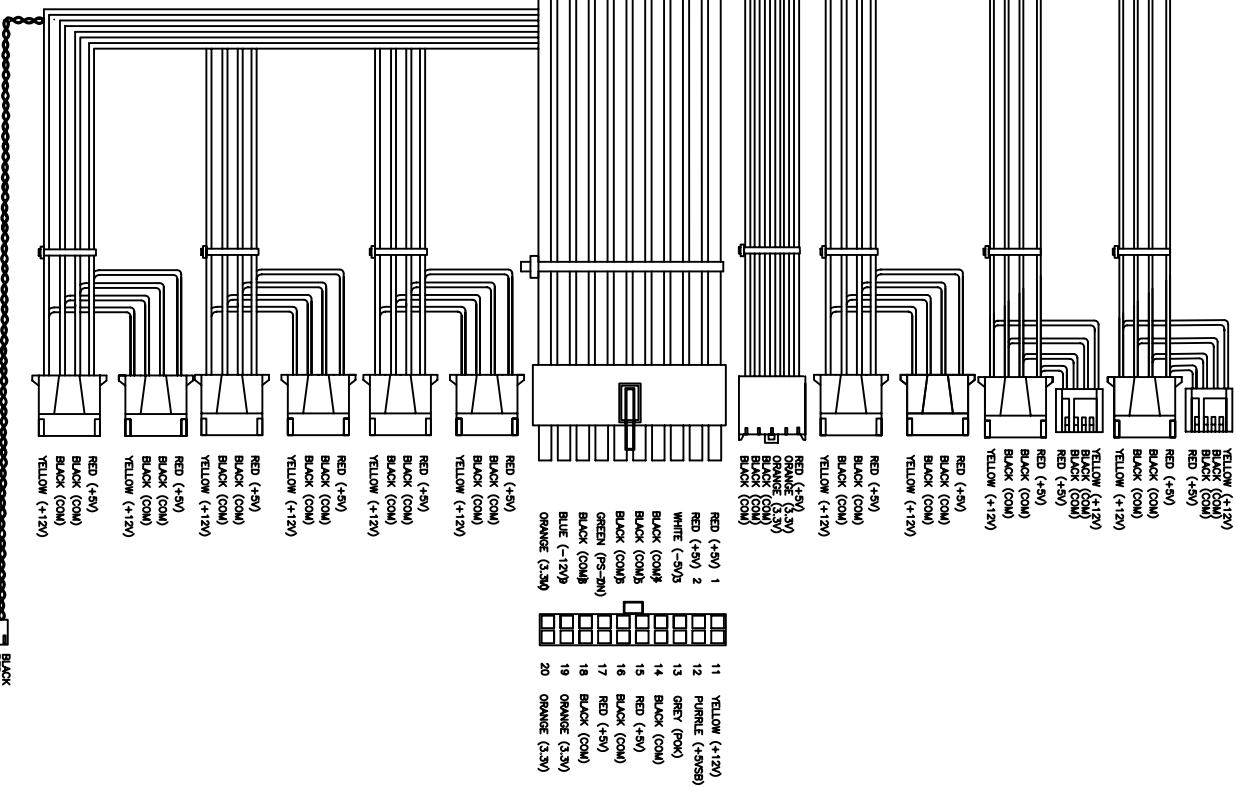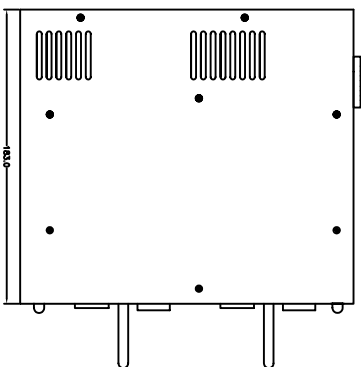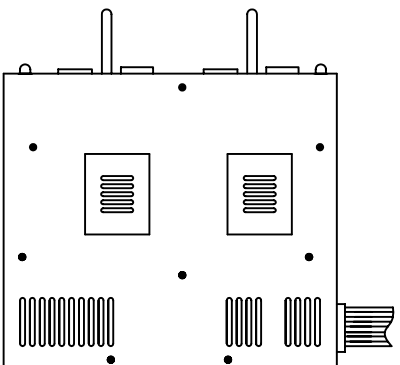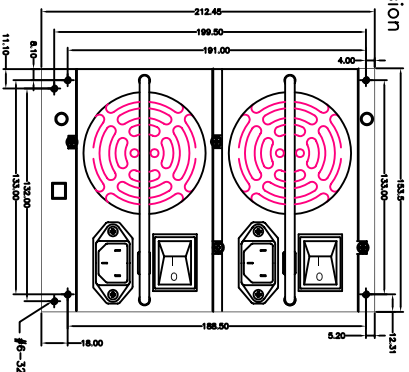

Zecks Power Co., Ltd.

DESCRIPTION	PS-300S-2X	UNIT	MM	APPROVED	CHECKED	DRAWN
PART NO.		SCALE	NON			
MODEL		TOLERANCE				

BLACK
RED

REV:1

新成發行